

R-32 (CH₂F₂)

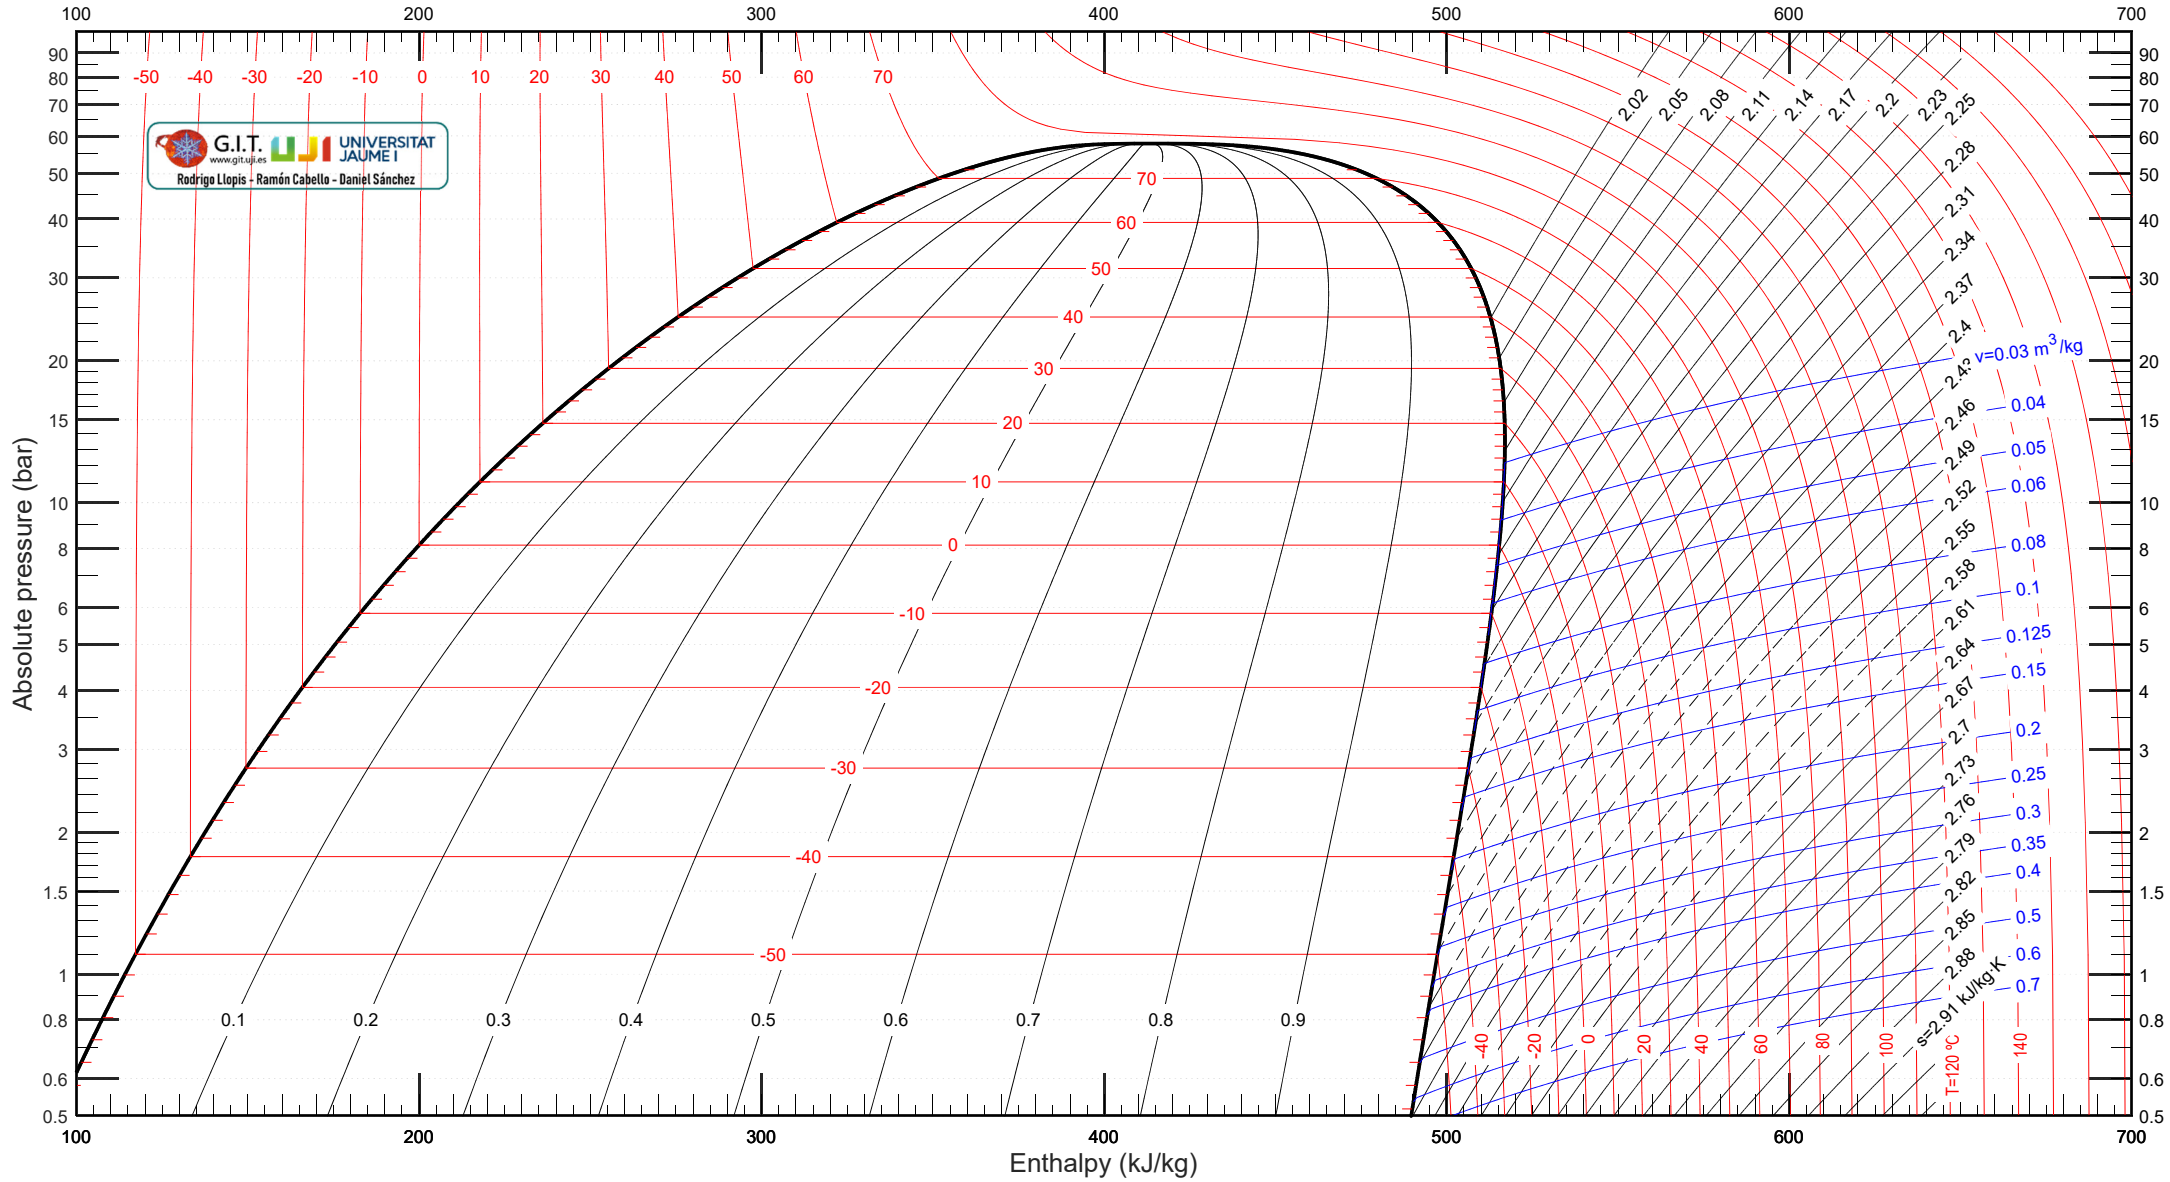


Diagram is available under the Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International (CC BY-NC-SA 4.0)

Reference: International Institute of Refrigeration. $h = 200 \text{ (kJ/kg)}$, $s = 1 \text{ (kJ/kg}\cdot\text{K)}$ saturated liquid at $t = 0^\circ\text{C}$.

Lemmon, E. W., et al. (2013). REFPROP NIST Standard Reference Database 23, v.9.1. National Institute of Standards and Technology, Gaithersburg, MD, U.S.A.

© Rodrigo Llopis (rllopis@uji.es) Thermal Engineering Group (G.I.T.) (www.git.uji.es), Jaume I University, Castellón, Spain. DOI: